

Chicago Incandescent Exits

CX



CX



ECX



ECX-SM

Dimensions

CX
Height: 9.5"
Width: 12.3"
Depth: 2.0"

ECX
Height: 12.5"
Width: 12.3"
Depth: 2.0"

ECX – Side Mount
Height: 9.5"
Width: 18.0"
Depth: 2.0"

(Add 2" Width for "STAIRS")

Accessories

Order Separately

63 Wire Guard (for Single-Face Back Mount CX Only)














P12W 12" Pendant Kit, White (Pendant Kits from 12" to 84" Available)

Options















Add Suffix to Catalog Number

- 6** (2) 6VDC Lamps for AC/6VDC Remote Operation
- 12** (2) 12VDC Lamps for AC/12VDC Remote Operation
- 277** 277VAC Input
- 2CKT** (2) Independent AC Circuits
- SM** Side-Mount Battery Pack (Instead of Top Mount)
- STAIR** "STAIR" Legend in Lieu of "EXIT"
- STAIRS** "STAIRS" Legend in Lieu of "EXIT"
- TP** Tamper-Proof Screws
- U** Universal Face (Additional Backplate – Double-Face Signs Only)
- UA** Universal Arrow (Additional Arrow Knockout Faceplate(s))


Series Features

-  • 120VAC Operation Standard
-  • Maximum Input Rating
120VAC 24 Watts
277VAC 30 Watts
-  • Long-Life Incandescent
-  • (2) 140VAC, 15-Watt Lamps
-  • Open-Face Glass Panel
-  • Silk Screen Letters
-  • Ceiling, End or Back Mount
-  • Canopy
-  • Downlight
-  • 20-Gauge Steel Housing
-  • White Powder-Coat Finish
-  • UL Listed
-  • Chicago Code Approved

Additional Emergency Unit Features

-  • Integrated Solid State System
-  • Multi-Rate, Controlled, Automatic Charger
-  • Lock Out (Automatic Battery Connect)
-  • Low-Voltage Battery Cutoff
-  • Brownout Sensitivity
-  • Dual-Voltage Transformer for 120/277 VAC Operation
-  • Maximum Input Rating
(120 or 277VAC) 26 Watts
-  • Long-Life Incandescent
-  • (2) 6 VDC, 6-Watt Lamps
-  • Sealed Lead Calcium Battery
-  • 6-Volt Operation
-  • Maintenance-Free
-  • Test Switch
-  • Red (Power On) Indicator

Specify Arrow Configuration on all Open-Face Signs

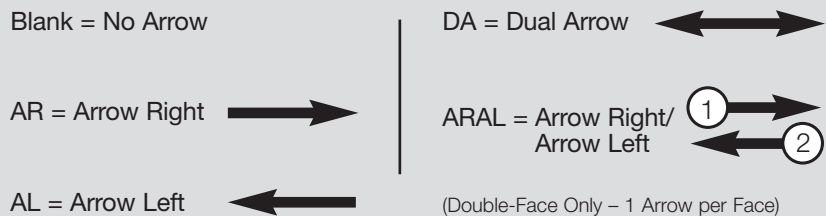

Ordering Information

ECX	2	R	W	W	-U
Series	# Faces	DC Battery Letter Color	Panel Color	Housing Color	Options
CX – AC ECX – Emer.	1 2	Red	White*	White* Black PM Painted Matte Chrome	

*Standard

