





## Series Features

- 
  - Solid State Charger
  - Dual-Voltage Transformer for 120/277 VAC Operation
  - Maximum Input Rating
    - 120VAC 60 Hz 4.0 Watt
    - 277VAC 60 Hz 4.0 Watt
- 
  - For Use on Single or Double Lamps
  - Illuminates Rapid Start, Instant Start, High Output, Slim Line, Circline, U-Shaped or Compact Lamps
- 
  - Sealed Nickel Cadmium Battery
  - Maintenance-Free
- 
  - Converts Fluorescent Fixtures to Emergency Lighting
  - Provides 1.5-Hour Illumination for Single or Double Lamps
  - Completely Self-Contained Inside or Above Lighting Fixture
  - Compact Steel Housing
  - Convenient Length Lead Wires
  - Test Switch
  - Red (Power On) Indicator
  - Operating Range: 50°–140°F
  - Warranty: 2–5 Years
  - UL Listed

## Linear Lamps

Lamps Operated	Qty.	EFB40 500 Lumens	EFB80 700 Lumens	EFB40-2 1300 Lumens	EPLB13 650 Lumens	EPLB26 650 Lumens	EPLB42 650 Lumens
2-4: Rapid, Instant Emergency Saving, T8 and T12	1	X	X	X			
2-4: Rapid, Instant Emergency Saving, T8 and T12, HO & VHO	2		X**	X**			
5-8: Rapid, Instant Emergency Saving, T8 and T12, HO & VHO	1		X	X			
		X	X	X			
			X	X			

## Compact Lamps

Lamps Operated	Qty.	EFB40 500 Lumens	EFB80 700 Lumens	EFB40-2 1300 Lumens	EPLB13 650 Lumens	EPLB26 650 Lumens	EPLB42 650 Lumens
5-, 7-, 9- & 13-Watt Twin Tube (2 pin)	1				X		
9W-13W USA Quad Tube (2 pin)	1				X		
18W-26W Quad Tube (2 pin)*1						X	
10W-26W Quad Tube (4 pin) 1 or 2							X
18W-39W Long Compact	1		X	X			
40-Watt Bi-ax	1			X			
50-Watt Bi-ax	1			X			
55-Watt Bi-ax	1						X
18W-26W Triple Tube (4 pin)							X


\*22- & 28-Watt 15 mm lamps are not compatible.

\*\*Note: Two-lamp emergency is not possible with all electronic ballasts. Consult customer service for specific ballast compatibility.

## Ordering Information

EFB40	-TMK
Model	Options

## EFB/EPLB

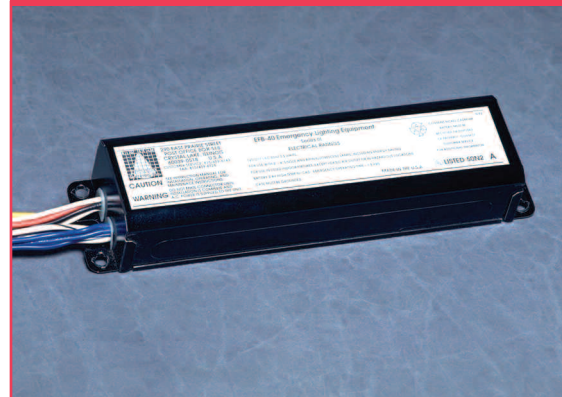

An affordable alternative to conventional emergency lighting, the EFB Series is a fluorescent ballast, which enhances existing AC fixtures by illuminating 1 or 2 lamps during a power failure.

### Dimensions

#### EFB40-2

Height: 1.5"  
Length: 13.125"  
Width: 2.375"  
Mtg. Ctr.: 12.75"

#### ALL OTHERS

Height: 1.5"  
Length: 9.5"  
Width: 2.375"  
Mtg. Ctr.: 9.0"

### Options

Add Suffix to Catalog Number

- FC Flex Cord
- RTSK Remote Test Switch Kit (EFB Series)
- TMK Top Mount Kit

