


# Commercial Emergency Lights

## RL (-PH)



Rectangular Heads  
Suffix "-PH"




Shown in Standard White Finish

## RL (-R)



Round Heads  
Suffix "-R"

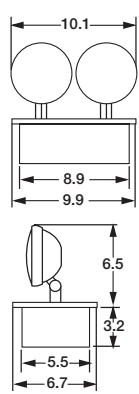

Shown in Standard White Finish

### Dimensions

**RL Rough-In Opening Size:**  
9" x 5 5/8"

### Options

Add Suffix to Catalog Number

- BG Beige Finish
- BLK Black Finish
- OW Designer Off-White Finish (Round Heads Only)
- PA Plenum Construction
- SD Self Diagnostic (See page 68)
- \*\* Special Lamp Wattage (See page 59)

The RL Series is ideal for installations requiring the aesthetic advantage of a fully recessed emergency unit.



## Series Features

- Integrated Solid State System
- Multi-Rate, Controlled, Automatic Charger
- Lock Out (Automatic Battery Connect)
- Low-Voltage Battery Cutoff
- Brownout Sensitivity
- Dual-Voltage Transformer for 120/277 VAC Operation
- Maximum Input Rating  
120VAC 60 Hz 0.35 Amps  
277VAC 60 Hz 0.15 Amps
- HIT Lamps
- PAR-36 Sealed Beams
- Sealed Lead Calcium Battery (S) or Sealed Nickel Cadmium Battery (N)
- 6-Volt Operation
- Maintenance-Free
- Fully Recessed Styling
- Steel Lamp Heads (Round)
- 20-Gauge Steel Housing
- Polycarbonate Lamp Heads (Rectangular)
- Includes (4) Adjustable Mounting Tabs
- White Powder-Coat Finish
- LED Power On (Charge) Indicator
- Test Switch
- UL Listed

## Unit Information

Model Number	Std. Lamp Watt	Watts per Hour				Replacement Battery	Head Shape
		1.5	2	3	4		
2RL6S5-R	6	12	9	6	-	(1) S65	Round
2RL6S5-PH	6	12	9	6	-	(1) S65	Rectangular
2RL6S8-R	9	18	14	9	7	(1) S68	Round
2RL6S8-PH	9	18	14	9	7	(1) S68	Rectangular
2RL6S10-R	9	32	24	16	12	(1) S610SL	Round
2RL6S10-PH	9	32	24	16	12	(1) S610SL	Rectangular
H2RL6S10†	12	32	24	16	12	(1) S610SL	Round
2RL6N7-R*	9	18	14	9	7	(1) N67F	Round
2RL6N7-PH*	9	18	14	9	7	(1) N67F	Rectangular
H2RL6N7*	8	18	14	9	7	(1) N67F	Round

†Chicago Code Approved

Illumination is rated to 87.5% of nominal system voltage and recharge to full capacity within 24 hours.

NEC requires 1.5 hours of emergency illumination.

\*Meets or Exceeds UL 924 Requirements.

## Ordering Information

H*	2	RL	6	S	10	-R	-PA
Halogen Lamp Prefix	Lamp Heads on Unit	Series	DC Battery Voltage	Battery Type (S - Sealed) (N - Ni Cad)	Battery Amp/Hour	Head Shape -PH (Rect.) -R (Round)	Options

\*Halogen Lamps not available with PH Heads.