


Commercial Emergency Lights

IM

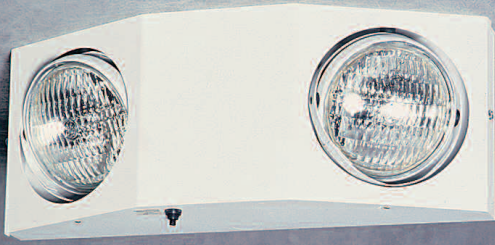

Dimensions

IM

Height: 6.5"
Width: 16.0"
Depth: 4.5"

Options

Add Suffix to Catalog Number

-.** Special Lamp Wattage
(See page 63)

The IM Series offers a high-end look for low-budget dollars. Designed to meet demanding architectural requirements, the attractive bevel design and recessed lamp heads complement commercial environments.



Made in USA

Series Features

- Integrated Solid State System
- Multi-Rate, Controlled, Automatic Charger
- Lock Out (Automatic Battery Connect)
- Low-Voltage Battery Cutoff
- Brownout Sensitivity
- Dual-Voltage Transformer for 120/277 VAC Operation
- Maximum Input Rating
120VAC 60 Hz 0.05 Amps
277VAC 60 Hz 0.02 Amps
- HIT Lamps
STD Lamp: See Unit Information
- PAR-36 Sealed Beams
- Sealed Lead Calcium Battery
- 6-Volt Operation
- Maintenance-Free
- Contemporary Bevel Design
- 20-Gauge Steel Housing
- Fully Recessed Lamp Enclosures
- Bi-Axial Lamp Rotation
- Universal Mount Backplate
- White Powder-Coat Finish
- Red (Power On) and Green (Trickle Charge) LED Indicators
- Test Switch
- UL Listed
- New York City Approved/Calendar #38236

Unit Information

| Model Number | Std. Lamp Watt | Watts per Hour | | | | | | | | Replacement Battery |
|--------------|----------------|----------------|----|----|----|----|---|---|---|---------------------|
| | | 1.5 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | |
| 2I M6S8 | 8 | 18 | 14 | 9 | 7 | - | - | - | - | (1) S68 |
| 2I M6S10 | 8 | 32 | 24 | 16 | 12 | 10 | 8 | 7 | 6 | (1) S610SL |
| H2I M6S10† | 12 | 32 | 24 | 16 | 12 | 10 | 8 | 7 | 6 | (1) S610SL |
| H2I M6S16† | 12 | 36 | 27 | 18 | 14 | 11 | 9 | 8 | 7 | (2) S68 |

†Chicago Code Approved

Illumination is rated to 87.5% of nominal system voltage and recharge to full capacity within 24 hours. NEC requires 1.5 hours of emergency illumination.

Ordering Information

| H | 2 | IM | 6 | S | 10 | -8 |
|---------------------|--------------------|--------|--------------------|---------------------------|------------------|---------|
| Halogen Lamp Prefix | Lamp Heads on Unit | Series | DC Battery Voltage | Battery Type (S - Sealed) | Battery Amp/Hour | Options |