

# Chicago LED Fire Escape

## CHL-FE



### Dimensions

Height: 9.5"  
Width: 21.0"  
Depth: 2.0"

### Options

Add Suffix to Catalog Number

-TP Tamper-Proof Screws

### Accessories

Order Separately

P12W 12" Pendant Kit, White\*



Made in USA

### Series Features


- 120/277 VAC Operation
- Maximum Input Rating (120 or 277VAC)
- Light-Emitting Diodes – 25+ Year Life
- Illuminates with Uniform Color and Brightness
- Indirect Placement for Diffused Legend Output
- Ceiling, End or Back Mount
- Canopy
- Open-Face Glass Panel
- Silk Screen Letters
- 20-Gauge Steel Housing
- White Powder-Coat Finish
- Chicago Code
- UL Listed

### Additional Emergency Unit Features

- Integrated Solid State System
- Constant Current, Controlled Automatic Charger Circuit
- Low-Voltage Battery Cutoff
- Brownout Sensitivity
- Increased LED Brightness Level in Emergency Mode
- Sealed Nickel Cadmium Battery
- 5-Year Shelf Life
- 10-Year Battery Warranty
- Maintenance-Free
- 3+ Hours Illumination in Emergency Mode\*
- Test Switch
- LED (Power On) Indicator

\*Longer Illumination Times Available. Consult Factory.

### Specify Arrow Configuration on all Open-Face Signs

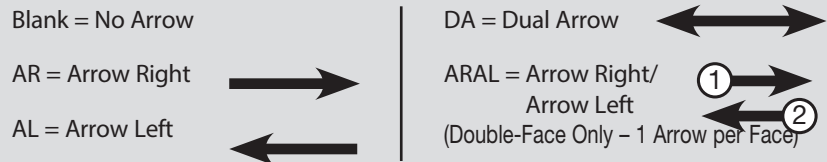

### Ordering Information

CHL-FE	1	R	W	W	-TP
CHL-FE AC Only	# Faces	Letter Color Red	Panel Color White	Housing Color White*	Option Factory Options
ECHL-FE Battery Backup	1 2			Black PM Painted Matte Chrome	