











## Series Features

- 
  - Maximum Input Rating
    - 120 VAC 24 Watts
    - 277 VAC 34 Watts
- 
  - White LED 3.7 Watts
  - 25 Year Life Expectancy
- 
  - Open-Face Glass Panel
  - Silk Screen Letters
  - Ceiling, End, or Back Mount
  - Canopy
  - Downlight
  - 20-Gauge Steel Housing
  - White Powder-Coat Finish
  - UL Listed
  - Chicago Code Approved

## Additional Emergency Unit Features

- 
  - Integrated Solid State System
  - Multi-Rate, Controlled, Automatic Charger
  - Lock Out (Automatic Battery Connect)
  - Brownout Sensitivity
  - Dual-Voltage Transformer for 120/277 VAC Operation
- 
  - White LED 3.7 Watts
  - 25 Year Life Expectancy
- 
  - Sealed Lead Calcium Battery
  - 6-Volt Operation
  - Maintenance-Free
- 
  - Test Switch
  - Red (Power On) Indicator


### Specify Arrow Configuration on all Open-Face Signs

- |                  |   |                                       |   |
|------------------|---|---------------------------------------|---|
| Blank = No Arrow |   | DA = Dual Arrow                       |  |
| AR = Arrow Right |  | ARAL = Arrow Right/<br>Arrow Left     |   |
| AL = Arrow Left  |  | (Double-Face Only - 1 Arrow per Face) |   |

## Ordering Information

ECXL	2	R	W	W	-UA
Series	# Faces	Letter Color	Panel Color	Housing/Trim Color	Options
ECXL Emer. Surface	1	Red	White*	White*	Factory Options
ERCXL Emer. Recessed	2			Black PM Painted Matte Chrome	

## ECXL / ERCXL

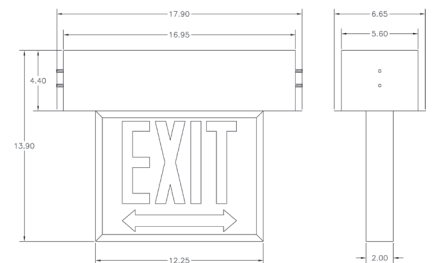

## Options

- Add Suffix to Catalog Number
- For ECXL Only
- TP Tamper-Proof Screws
  - U Universal Face (Additional Backplate-Double-Face Signs Only)
  - UA Universal Arrow (Additional Arrow Knock-out Faceplates)
  - SM Side-Mount Battery Pack
  - WOB Without Battery
  - 4HR 4-Hour

## Dimensions

- ECXL  
Height: 16.0"  
Width: 12.3"  
Depth: 2.8"
- ERCXL  
Rough in Opening  
5.8" x 16.8"



Made in USA