LED Edge Lit Fire Escape


Series Features

120/277 VAC Operation

- Maximum Input Rating (120 or 277VAC)
- Light-Emitting Diodes 25+ Year Life
- Illuminates with Uniform Color and Brightness
- Indirect Placement for Diffused Legend Output
- Ceiling or Back Mount
- Recessed or Surface Mount Housing
- Clear Acrylic, Edge Lit Panel
- Silk Screen Letters
- 20-Gauge Steel Housing
- White Powder-Coat Finish
- Chicago Code

Additional Emergency Unit Features					
	Integrated Solid State System				
	Constant Current, Controlled Automatic Charger Circuit				
	Low-Voltage Battery Cutoff				
	Brownout Sensitivity				
	Increased LED Brightness Level in Emergency Mode				
Ċ	 Sealed Nickel Cadmium Battery Backup Option 				
	• 5-Year Shelf Life				
	• 10-Year Battery Warranty				
	Maintenance-Free				
\bigotimes	Test Switch				
	LED (Power On) Indicator				


*Longer Illumination Times Available. Consult Factory.

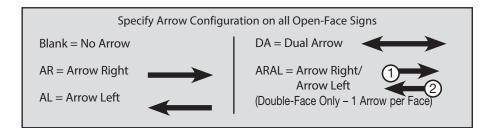

Ordering Information

RCHXL-FE	1	W	R	W	С	R	-PA
<u>RCHXL-FE</u> AC Only <u>ERCHXL-FE</u> Battery Backup	# Faces	Trim Color <u>W</u> hite* <u>B</u> lack <u>BR</u> Brass <u>PM</u> Painted Matte Chrome	Letter Color <u>R</u> ed	Background Color <u>W</u> hite	Fixture Type <u>C</u> eiling <u>W</u> all	Mounting Type <u>R</u> ecessed <u>S</u> urface	Options Factory Options





RCHXL-FE



Dimensions

Width: 24.00" Height: 12.00" Depth: 6.00"

Options Add Suffix to Catalog Number

- -2CKT (2) Independent AC Circuits -E End Mount (Use Surface Mount -
 - Ceiling as Base Model) Stainless Steel
 - Trim For Ceiling Recessed
 - -PA Plenum

-SS

Plenum Construction (for Ceiling Recessed models only)



