

Emergency LED Drivers




ELB



ELB series offers an alternative to conventional emergency lighting

Dimensions

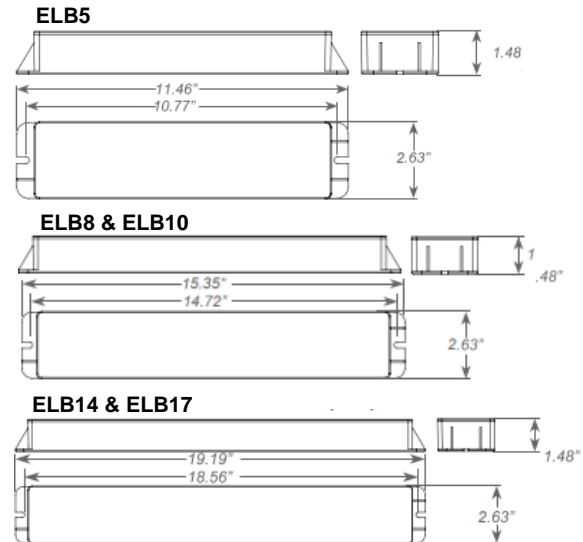

Series Features

- Universal 120-277V, 50-60 Hz input
- Charge/Power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- Long life rechargeable NiCad battery
- 90 minute minimum emergency operating time
- Output overcurrent protection
- Suitable mounting inside, on top, or in remote mount of fixture

Ordering Information

ELB	5W
Series	Wattage 5 – 5W 8 – 7.8W 11- 10.7W 14 – 13.7W 17 – 17W

Key Specs

Model	Wattage	Voltage (VDC)	Current (mA)
ELB5	5.0	20-50	250-100
ELB8	7.8	20-50	390-156
ELB11	10.7	20-50	535-214
ELB14	13.7	20-50	685-274
ELB17	17.0	20-50	850-340
UL Listed; 5 Year Warranty			