

The WCHL is Chicago Approved and Wet Location. Offering protection to a degree in outdoor applications. It is recommended to have awning coverage of some sort, otherwise please use the WCHL-4X Big Beam offers. Comes with a durable Lexan lens. This fixture is exclusive to Big Beam. Available in AC only and Battery Backup. STAIRS/STAIR & Area Of Rescue Assistance glass is available.

### FEATURES

- Units Satisfy the Requirements NEMA 3R Wet Location
- 120/277 VAC Operation
- Maximum Input Rating (120 or 277VAC)
- Standard 1.7W LED strip
- Light-Emitting Diodes—25+ Year Life
- Indirect Placement for Diffused Legend Output
- Integrated Solid State System
- Constant Current, Controlled Automatic Charger Circuit
- Low—Voltage Battery Cutoff
- Brownout Sensitivity
- AC Power On LED Indicator Light
- Push to Test Button
- Sealed Nickel Cadmium Battery
- Open-Face Glass Panel
- Chicago Code Exit 20 Gauge Steel
- Heater recommended for Battery Backup versions to keep the battery protected and from reaching below 60F
- Ceiling, End, Or Back mount, Canopy Kit Included
- “63” Wire Guard available, consult with factory
- “P12W” 12” Pendant Kit (White) available. Consult with factory



#### Dimensions:

Height: 10.75"  
Width: 13.00"  
Depth: 2.75"




### WCHL

The WCHL is wet location/outdoor rated. Needs an awning or some coverage. Will not protect against spray down or beating rain

#### Options:

- ❖ **STAIRS**
- ❖ **STAIR**
- ❖ **AORA/HC** – Area Of Rescue Assistance with Handicap Symbol
- ❖ **HTRxxx** – Heater “xxx” specify 120V or 277V
- ❖ **TP** – Tamper Proof Screws

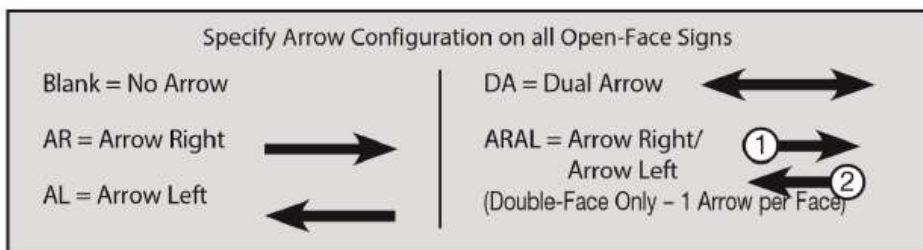

Series	Faces	Letter Color	Glass Finish	Housing Finish	Options
WCHL = AC ONLY	1 = SINGLE FACE	R = Red	W = White	W = White	-HTRxxx
EWCHL = BATTERY BACKUP	2 = DOUBLE FACE			B = Black	

\*Specify arrow configuration after this