

This ELB3 backup driver will support single ended direct drive tubes. Offers a 5W backup, Maximum load is 40W

FEATURES

- 120/277VAC
- 5W MAX output power
- Constant wattage LED Emergency Driver
- 40-300VDC Output
- OUTPUT CURRENT LOAD DEPENDANT
- One Piece Design with Metal Housing
- 2 -in- 1 LED test switch and indicator light included
- Evaluated to UL 924 requirements
- Not for use with dimmers
- Illuminates entire LED load at reduced output under emergency mode
- UL Listed
- Operating Temperature: 32°F/0°C to 122°F/50°C
- Input Frequency: 50/60 Hz
- Maximum Load: 40W
- Li(NiCoMn)O2 Battery
- 90 Minute operation in Emergency Mode




ELB3

The ELB3 is essentially an AC / LED Emergency Driver all-in-one for LED T8's

Emergency pack designed to deliver 5W to a constant current LED load. Approximate output is 500 lumens assuming a nominal minimum efficacy of 100lm/W.

WARRANTY

5 Year Warranty

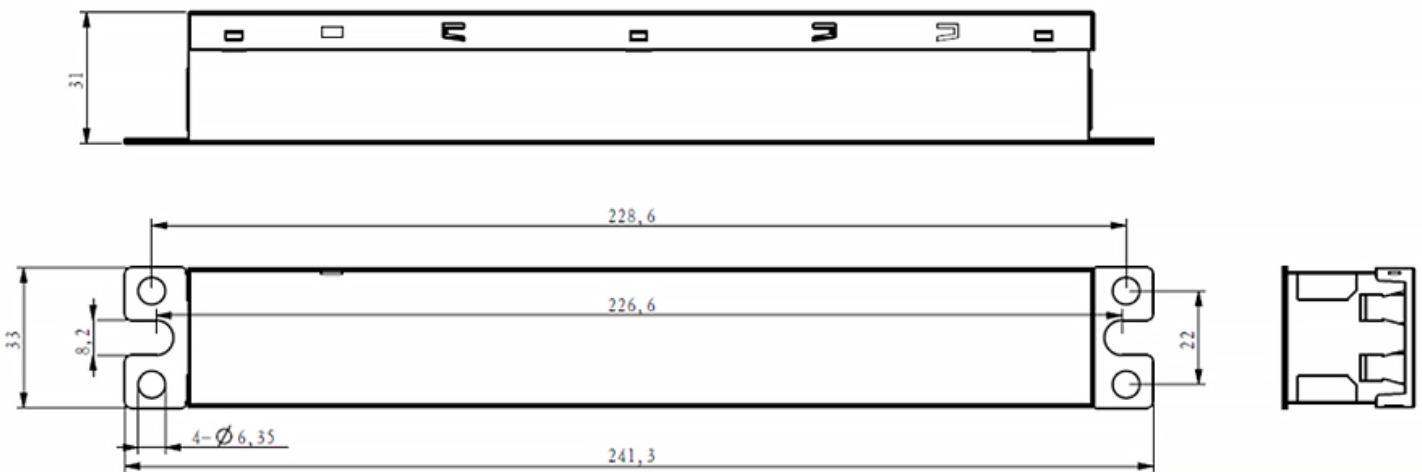

Series	Wattage
ELB3	5 = 5W

